

10-2-00

A


IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this paper and the documents and/or fees referred to as attached therein are being deposited with the United States Postal Service on September 28, 2000 in an envelope as "Express Mail Post Office to Addressee" service under 37 CFR §1.10, Mailing Label Number **EL631003935US**, addressed to the Assistant Commissioner for Patents, Washington, DC 20231.

Attorney Docket No.: LAM1P151

First Named Inventor: CHEN


Mandy Franklin



UTILITY PATENT APPLICATION TRANSMITTAL (37 CFR. § 1.53(b))

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

☐ Duplicate for
fee processing

Sir: This is a request for filing a patent application under 37 CFR. § 1.53(b) in the name of inventors:
JIAN J. CHEN, MUKUND SRINIVASAN AND ERIC H. LENZ

For: **CHAMBER CONFIGURATION FOR CONFINING A PLASMA**

Application Elements:

- ☒ 28 Pages of Specification, Claims and Abstract
- ☒ 4 Sheets of **formal** Drawings
- ☐ ** Pages Combined Declaration and Power of Attorney

Accompanying Application Parts:

- ☐ Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)
- ☐ 37 CFR 3.73(b) Statement by Assignee
- ☒ Information Disclosure Statement with Form PTO-1449
 - ☒ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard
- ☐ Small Entity Statement(s)
- ☐ Other:

PLEASE DO NOT CHARGE A FILING FEE AT THIS TIME

JC841 U.S. PTO
09/676269
09/28/00

General Authorization for Petition for Extension of Time (37 CFR §1.136)

☒ Applicants hereby make and generally authorize any Petitions for Extensions of Time as may be needed for any subsequent filings. The Commissioner is also authorized to charge any extension fees under 37 CFR §1.17 as may be needed to Deposit Account No. 50-0388 (Order No. LAM1P151).

☒ Please send correspondence to the following address:

Customer Number 022434
BEYER WEAVER & THOMAS, LLP
P.O. Box 778
Berkeley, CA 94704-0778
Telephone (650) 961-8300
Fax (650) 961-8301



Date:

9/28/00

Quin C. Hoellwarth
Registration No. 45,738

CHAMBER CONFIGURATION FOR CONFINING A PLASMA

BY INVENTORS:

Jian J. Chen

Mukund Srinivasan

Eric H. Lenz

Background of the Invention

The present invention relates to apparatus and methods for processing substrates such as semiconductor substrates for use in IC fabrication or glass panels for use in flat panel display applications. More particularly, the present invention relates to improved techniques for controlling plasma formation in a process chamber of a plasma reactor.

The use of plasma-enhanced processes in the manufacture of semiconductor-based products (such as integrated circuits or flat panel displays) is well known. In general, plasma-enhanced processes involve processing a substrate in a process chamber of a plasma reactor. In most plasma reactors, a plasma may be ignited and sustained by supplying a gas containing appropriate etchant or deposition source gases into the process chamber and applying energy to those source gases to respectively etch or deposit a layer of material on the surface of the substrate. By way of example, capacitive plasma reactors have been widely used to process semiconductor substrates and display panels. In capacitive plasma reactors, a capacitive discharge is formed between a pair of parallel electrodes when RF power is applied to one or both of the electrodes.

Although the plasma predominantly stays in the process area between the pair of electrodes, portions of the plasma may fill the entire chamber. A plasma typically goes where it can be sustained, which is almost anywhere in the chamber. By way of

example, the plasma may fill the areas outside the process region such as the bellows of the pumping arrangement. If the plasma reaches these areas, etch, deposition and/or corrosion of the areas may ensue, which may lead to particle contamination inside the process chamber, and/or which may reduce the lifetime of the chamber or chamber parts. Furthermore, a non-confined plasma may form a non uniform plasma, which may lead to variations in process performance.

Accordingly, there are continuing efforts to produce plasmas, which are confined to the process region, and thus more stable. Confined plasmas tend to ensure efficient coupling of energy to discharges, enhance plasma uniformity, and increase plasma density, all of which lead to better processing uniformity and high yields on processed substrates. There are various ways to achieve a confined plasma. One approach uses external magnetic fields to confine the plasma. Another approach uses a confinement ring to confine the plasma. The confinement ring is typically formed from an insulating material that physically blocks the plasma pumping passage, thereby confining the plasma. Both approaches have proven to be highly suitable for plasma processing, and more particularly for improving process control and ensuring repeatability. Although these approaches work well, there are continuing efforts to improve plasma confinement, and more particularly for minimizing and/or eliminating the unwanted plasma formation in the region outside of the process region of the process chamber. For example, depending on power, pressure and chemistries, a relatively strong electric field and a substantial amount of residue ionic species may be present outside the confined plasma region, which can further induce glowing discharge outside the confined process region, i.e., plasma un-confinement.

Summary of the Invention

The invention relates, in one embodiment, to a plasma confining assembly for minimizing unwanted plasma formations in regions outside of a process region in a process chamber. The assembly includes a first confining element positioned proximate the periphery of the process region. The first confining element includes an exposed conductive surface that is electrically grounded. The assembly further includes a second confining element positioned proximate the periphery of the process region and spaced apart from the first confining element. The second confining element includes an exposed insulating surface, which is configured for covering a conductive portion that is electrically grounded. The first confining element and the second confining element are arranged to substantially reduce the effects of plasma forming components (e.g., charged particles and/or electric fields) that pass therebetween.

In other embodiments, the plasma confining assembly additionally includes a third confining element formed from an insulating material. The third confining element is disposed between the first confining element and the second confining element and proximate the periphery of the process region. The third confinement element is arranged to physically contain a plasma inside the process region and to substantially reduce the effects of plasma forming components that pass between the first confining element and the second confining element.

The invention relates, in another embodiment, to a plasma reactor for processing a substrate. The plasma reactor includes a chamber having chamber walls. The plasma reactor further includes an electrode arrangement configured for generating an electric field, which is sufficiently strong to both ignite and sustain a plasma for the processing within the chamber. The electrode arrangement includes a first electrode and a second electrode, which are spaced apart thereby defining a process region therebetween. The plasma reactor additionally includes a plasma confinement assembly for preventing the plasma from forming outside of the process region. The plasma confinement assembly includes a first ring, which is configured to surround the first electrode, and a second ring, which is configured to surround the

second electrode. The first ring includes an exposed conductive surface that is electrically grounded, and the second ring includes an exposed insulating surface covering a non exposed conductive element that is grounded. The plasma confinement assembly is arranged to substantially reduce the effects of plasma forming components that pass between the first confinement ring and the second confinement ring.

In some embodiments, the plasma confining assembly also includes a pressure control ring formed from a dielectric medium and disposed between the first and second rings. The pressure control ring is configured for physically confining a plasma within the process region, while permitting the passage of process gases to pass therethrough.

In other embodiments, the first ring includes an inner ring and an outer ring. The inner ring is formed from a dielectric medium and disposed between the first electrode and the outer ring, and the outer ring includes a grounded conductive surface. In other embodiments, the second ring includes an inner ring and an outer ring. The inner ring is formed from a dielectric medium and disposed between the second electrode and the outer ring, and the outer ring includes a conductive core, which is covered by the insulating layer, and which is electrically grounded.

Brief Description of the Drawings

5 The present invention is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings and in which like reference numerals refer to similar elements and in which:

10 Fig. 1 illustrates a plasma reactor, in accordance with one embodiment of the present invention.

15 Fig. 2 shows a broken away view of the plasma reactor of Fig. 1, in accordance with one embodiment of the present invention.

20 Figs. 3 illustrates a lower ring, in accordance with one embodiment of the present invention.

25 Fig. 4 illustrates an upper ring, in accordance with one embodiment of the present invention.

 Fig. 5 illustrates an upper ring, in accordance with one embodiment of the present invention.

 Fig. 6 illustrates a plasma reactor, in accordance with one embodiment of the present invention.

 Fig. 7 shows a conductive upper ring and a conductive lower ring.

Detailed Description of the Invention

The present invention will now be described in detail with reference to a few preferred embodiments thereof as illustrated in the accompanying drawings. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent, however, to one skilled in the art, that the present invention may be practiced without some or all of these specific details. In other instances, well known process steps have not been described in detail in order not to unnecessarily obscure the present invention.

It has been discovered that unwanted discharges or plasmas may be encountered when large charged particle fluxes and/or large electric fields are present in regions outside of the process region of the process chamber. As the term is employed herein, the process region refers to the region of the process chamber used for processing a substrate, for example, the area directly above the substrate. With regards to charged particles, charged particles leaving the process region may collide with the wall of the process chamber, and as a result generate secondary electrons that can ignite and/or sustain a plasma. With regards to the electric field, an electric field can accelerate the electrons causing them to collide with the gas molecules of the process gas, which as a result can ionize and initiate a plasma. In addition, charged particles tend to follow the electric field lines and thus stray electric field lines may guide more charged particles into regions outside of the process region of the process chamber. For example, electric fields can accelerate charged particles in a direction towards the walls of the process chamber. This acceleration and subsequent collision between the charged particles and the chamber walls may generate secondary electrons, which may ignite and/or sustain a plasma.

The invention therefore pertains to an improved method and apparatus for confining a plasma to a process region of a process chamber. More particularly, the invention pertains to a system for minimizing and/or eliminating unwanted discharges (or plasma formations) in regions outside of the process region of the process chamber. For ease of discussion, the regions outside of the process region will herein be referred to as the outer regions of the process chamber. One aspect of the

invention relates to reducing the density of charged particles in the outer regions of the process chamber. For example, by absorbing particles on surfaces before they reach the outer regions or by not allowing the particles to pass to the outer regions. Another aspect of the invention relates to attenuating the electric field (used to form the plasma) in the outer regions of the process chamber. For example, by directing electric fields away from the outer regions. The invention is particularly useful in plasma processing systems that utilize capacitive discharges to form the plasma.

In accordance with one embodiment of the present invention, there is provided a plasma confining assembly for confining a plasma in a process region of a process chamber. The assembly includes a first confining element, which is positioned towards a side of the process region, and which includes an exposed conductive surface that is electrically grounded. The assembly also includes a second confining element, which is positioned towards the side of the process region and spaced apart from the first confining element, and which includes an exposed insulating surface covering an un-exposed conductive portion that is electrically grounded. In some configurations, the plasma confining assembly may include an insulated pressure control ring, which is also positioned towards the side of the process region, and between the first and second confining elements.

Although the above assembly is not limited to the following, it is generally believed that the above assembly achieves plasma confinement by capturing charged particles streaming out of the process region of the process chamber and shielding portions of the electric field straying outside of the process region of the process chamber. For instance, the assembly is configured to direct charge particles to the conductive surface of the first confining element and sink particles therethrough to ground so as to reduce the density of charged particles in regions outside of the process region. The assembly is also configured to neutralize some of the charged particles on the pressure control ring so as to reduce the density of charged particles in regions outside of the process region. Moreover, the assembly is configured to redirect stray electric fields through the conductive surface and to ground so as to reduce electric fields in regions outside of the process region. For example, the direction of electric fields can be altered so that the electric fields no longer have a

line of sight that extends to the outer regions of the process chamber or the chamber walls.

Embodiments of the invention are discussed below with reference to Figs. 1-7.

5 However, those skilled in the art will readily appreciate that the detailed description given herein with respect to these figures is for explanatory purposes as the invention extends beyond these limited embodiments.

10 Fig. 1 is a schematic diagram of a plasma reactor 10, in accordance with one embodiment of the present invention. Plasma reactor 10 includes a process chamber 12, a portion of which is defined by a top plate 13 and chamber walls 14, and within which a plasma 17 is both ignited and sustained for processing a substrate 18. Substrate 18 represents the work piece to be processed, which may represent, for example, a semiconductor substrate to be etched or otherwise processed or a glass panel to be processed into a flat panel display. In most embodiments, the process chamber 12 is arranged to be substantially cylindrical in shape, and the chamber walls are arranged to be substantially vertical. Furthermore, the top plate 13 and chamber walls 14 are generally grounded and formed from a suitable material such as aluminum. In the embodiment shown, the top plate 13 and chamber walls 14 are electrically connected (at interface 19) and grounded as indicated at 16. The top plate 13 and chamber walls 14 may also include insulating surfaces 15, which may be formed from a suitable dielectric material or in the case of an aluminum top plate or chamber wall the insulating surface may formed from anodized aluminum. It should be understood, however, that the above mentioned configurations are not a limitation and that they may vary according to the specific design of each plasma reactor. For example, the chamber walls may be sloped or the top plate may be separately grounded.

30 In most embodiments, the substrate 18 is introduced into the process chamber 12 and disposed between a pair of parallel electrodes, and more particularly a bottom electrode 20 and a top electrode 24. The bottom and top electrodes 20, 24 define a process region 26 therebetween. As shown, the plasma 17 is confined vertically between the bottom electrode 20 and the top electrode 24. The bottom electrode 20 may serve as a chuck for supporting and holding the substrate 18 during processing.

By way of example, the chuck may be an electrostatic chuck, a vacuum chuck, or a mechanical chuck. The electrodes 20, 24 are also generally arranged to be substantially cylindrical in shape and axially aligned with an axis 11 of the process chamber 12 such that the process chamber 12 and the electrodes 20, 24 are cylindrically symmetric. In addition, the electrodes 20, 24 are generally configured with similar dimensions, for example, the electrodes may have the same diameter. It should be appreciated, however, that the size, shape and placement of the electrodes may vary according to the specific design of each plasma reactor. Furthermore, an edge ring 27 may be provided to improve the electrical and mechanical properties of processing near the substrate's edge, as well as to shield the bottom electrode 20 from reactants (i.e., ion bombardment). The edge ring 27 is arranged to surround the edge of the substrate 18 and cover the bottom electrode 20. The edge ring 27 is generally formed from a suitable dielectric material such as ceramic, quartz, plastic and the like.

In general, the electrodes 20, 24 are configured to deliver high frequency energy into the process region 26 of the process chamber 12 so as to ignite and sustain the plasma 17. More specifically, and in the embodiment shown, the top electrode 24 is coupled to the top plate 13, which is grounded as indicated at 16, and the bottom electrode 20 is coupled to an RF power supply 28 via a matching network 30. Matching networks are generally well known in the art and for the sake of brevity will not be discussed in great detail herein. The top electrode 24 is arranged to be electrically continuous with the top plate 13, and therefore the top electrode 24 is also grounded (e.g., completes RF circuit). The top electrode 20 may be formed from a suitable conductive material such as silicon. Furthermore, the RF power supply 28 is configured to supply the bottom electrode 20 with RF energy. In the illustrated embodiment, the RF power supply 28 consists of a first RF power supply 28A and a second RF power supply 28B. The first RF power supply is configured to apply a first RF frequency to the bottom electrode 20 and the second RF power supply is configured to apply a second RF frequency to the bottom electrode 20. By way of example, the first RF frequency may be about 27 MHz and the second RF frequency may be about 2 MHz. As is generally well known, a higher frequency is used to control the density of the plasma and the quantity of ions incident on the substrate, while a lower frequency is used to control the energy of the ions incident on the

substrate. Moreover, the bottom electrode 24 may be formed from a suitable conductive material such as aluminum.

In the plasma reactor shown in Fig. 1, the RF frequencies are driven on the bottom electrode 20 and capacitively coupled to the plasma 17. The plasma 17 and its sheaths oscillate periodically at these radio frequencies and the positive ions in the plasma 17 are accelerated by the sheath voltage to the grounded top electrode 24. As should be appreciated, the driving RF currents supplied to the bottom electrode 20 should be balanced with the plasma ion current on the top electrode 24 plus any ion flux leaking out of the process region 26. In the sense of an electric circuit, this is continuity for the RF current. In an ideal situation, the RF current comes in the bottom electrode 20 passes through the plasma 17 to the top electrode 24, and then travels through the top plate 13 to the chamber 14, where it finally terminates to the ground 16 and completes a round trip.

In accordance with another aspect of the invention, therefore, good electrical conductance through the desired RF return path is provided to enhance plasma confinement. A good electrical path helps to drive the RF frequencies and therefore to efficiently couple RF to the plasma. More specifically, a good electrical path tends to attract more ion flux to the top electrode which as a result reduces the ion flux to the other undesirable paths such as outside of the confined region or process region 26. Accordingly, the plasma is better confined.

In one embodiment, the top electrode 24 is formed from a low resistivity material so as to improve the electrical conductance through the RF return path. By way of example, the top electrode may be formed from a suitable semiconductor (e.g., silicon) having a resistivity (bulk) in the range of about 10 ohm-cm to about 0.01 ohm-cm.

In another embodiment, good electrical contact is made between the top plate 13 and the chamber walls 14 (interface 19) so as to improve the electrical conductance through the RF return path. In this embodiment, the good electrical contact is made by introducing a RF gasket 21 at the interface 19, i.e., between the top plate 13 and the chamber wall 14. The RF gasket 21 is configured to be a compliant electrical

conductor. By compliant it is meant that the RF gasket 21 takes the shape of the top plate 13 and the chamber wall 14 at the interface 19. In one configuration, the cross sectional shape of the RF gasket 21 takes the form of a spiral (similar to a thin circular spring). The spiral allows the RF gasket 21 to become compressed between the top
5 plate 13 and the chamber wall 14 so as to couple the two together. When compressed, each spiral contacts an adjacent surface making the RF gasket 21 an integrated conductive element that provides an electrical path between the top plate 13 and the chamber walls 14. The RF gasket is generally formed from a suitable conductive material such as stainless steel.

10 Although the bottom electrode is shown and described as being coupled to a pair of RF power supplies, it should be understood that other configurations may be used to accommodate different process chambers or to conform to other external factors necessary to allow the coupling of energy. For example, a single frequency
15 plasma reactor or a dual frequency plasma reactor with one RF power supply coupled to the bottom electrode and another coupled to the top electrode may be used.

In addition, a gas injector (not shown) is typically provided for releasing a single gaseous source material or a mixture of gaseous source materials into the
20 process chamber 12, and more particularly the process region 26 between the top and bottom electrodes 20, 24. By way of example, a gas injection port(s) may be built into the walls of the process chamber itself or through a shower head arrangement in the top electrode. An exhaust port 34 is also provided for exhausting spent gases formed during processing. As shown, the exhaust port 34 is located in an outer region 36 of
25 the process chamber 12 and disposed between the chamber walls 14 and the bottom electrode 20. The exhaust port 34 is generally coupled to a turbomolecular pump (not shown), which is located outside of the process chamber 12, and which is arranged to maintain the appropriate pressure inside the process chamber 12. Furthermore,
30 although the exhaust port is shown disposed between the chamber walls and the bottom electrode, the actual placement of the exhaust port may vary according to the specific design of each plasma processing system. For example, the exhausting of gases may also be accomplished from ports built into the chamber walls. Gas systems that include gas injectors and exhaust ports are well known in the art and for the sake of brevity will not be discussed in anymore detail herein.

In order to create the plasma 17, a process gas is typically input into the process region 26 from the gas injection port or ports (not shown). Power is then supplied to the bottom electrode 20 using the RF power source 28, and a large electric field (shown graphically with electric field lines 95) is produced inside the process chamber 12. Most of the electric field lines are contained between the bottom electrode 20 and top electrode 22, although some electric field lines may stray beyond this boundary. The electric field accelerates the small number of electrons present inside the process chamber 12 causing them to collide with the gas molecules of the process gas. These collisions result in ionization and initiation of the plasma 17. As is well known in the art, the neutral gas molecules of the process gas when subjected to these strong electric fields lose electrons, and leave behind positively charged ions. As a result, positively charged ions, negatively charged electrons and neutral gas molecules are contained inside process chamber 12. During processing, the ions are typically made to accelerate towards the substrate where they, in combination with neutral species, activate substrate processing, i.e., etching, deposition and/or the like. Most of the charged species (e.g., ions and electrons) are contained inside the process region 26 to facilitate substrate processing, although some charged species may stray outside of this region (for example through the pumping passage 37).

In accordance with one embodiment of the invention, during operation of the plasma reactor 10, the plasma discharge generated between the electrodes 20 and 24 is substantially confined to the process region 26 by providing a confinement system 50. For ease of discussion, Fig. 2 depicts a broken away side view of the plasma reactor 10 in accordance with this embodiment so as to provide a closer look at the confinement system 50 and its functions. The confinement system 50 includes a pressure control ring 52 (or confinement ring) and a confining assembly 51, including an upper ring 53 and a lower ring 54. In the embodiment shown, the confining system 50 is disposed in a pumping passage 37, which is positioned to the side of the process region 26. The confinement system 50 is configured for confining the plasma 17 to the process region 26 of the process chamber 12 and for minimizing and/or eliminating unwanted plasma formations in the outer regions 36 of the process chamber 12. In most cases, the pressure control ring 52 is configured for physically confining the plasma 17 and for neutralizing a portion of the charged particles that

stray out of the process region 26. In addition, the confining assembly 51 is configured for capturing (neutralizing) a portion of the charged particles that stray out of the process region 26 and for attenuating the electric field lines that stray out of the process region 26. Moreover, the confining assembly 51 may be configured to at least
5 in part physically confine the plasma 17.

The pressure control ring 52 is an annular ring arranged to surround the process region 26 and to control the gas pressure in the plasma 17. The pressure control ring 52 is generally disposed between the planes that define the surfaces of the
10 electrodes 20 and 24, and more particularly is disposed within the pumping passage 37 adjacent to the process region 26. As shown, the pressure control ring 52 physically blocks a portion of the pumping passage 37 and thus it can restrict the plasma 17 from radially leaving the process region 26 (e.g., confinement). More specifically, the pressure control ring 52 has an inner surface 56, which is exposed to
15 the process region 26 and an outer surface 58, which is exposed to the outer region 36. The pressure control ring 52 also has an upper surface 57, which is spaced apart from the upper ring 54, and a lower surface 59, which is spaced apart from the lower ring 53. As such, the pressure control ring 52 is disposed between the upper and lower rings 53, 54. In addition, the pressure control ring 52 is generally formed from an
20 insulating material and can be either a single ring or several rings.

Furthermore, the pressure control ring 52 generally includes a plurality of passages 60 extending from the inner surface 56 to the outer surface 58. The passages 60 are dimensioned to permit by-product gases or spent gases (formed during
25 processing) to pass through while substantially confining the plasma to the process region 26. In addition, the passages 60 are configured to substantially neutralize charged particles (created in the plasma) that stream out of the process region 26. More specifically, the passages are appropriately proportioned such that the distance a charged particle must travel in the passages is substantially longer than the mean free
30 path of the charged particle so that most exiting particles make at least one collision with the walls of the passage. These collisions tend to neutralize the charge of the particle. Accordingly, the tendency for a discharge outside the process region is reduced.

As should be appreciated, the width (from 57 to 59) and thickness (from 56 to 58) of the pressure control ring 52 can be adjusted to enhance plasma confinement.

For example, a pressure control ring with a relatively large width and thickness generally lead to better plasma confinement since a large width or a large thickness

restricts gas pumping conductance and increases the residence time for charged species and radicals to pass through, thereby increasing the chance of charge exchange and neutralization. In particular, a wider pressure control ring provides more surface area for charged species to be exchanged and neutralized and for radicals to be quenched, while a pressure control ring with relatively large thickness further reduces the direct line of sight gap from the confined plasma region to the outside, thereby reducing the chance of the direct electrical breakdown.

In one configuration, the pressure control ring includes a stack of annular rings formed from a suitable dielectric material such as high quality fused silica or quartz.

When assembled, the annular rings are separated by spacers (not shown) that also may be formed from a suitable dielectric material such as quartz. The spacers may be washers or raised regions of the annular rings. Screws may be threaded through the rings and washers to form a rigid structure. In addition, the pressure control ring can be supported directly or indirectly by connecting it to some portion of the process chamber, for example to the upper ring. The spaces between adjacent rings form distinct parallel circumferential passages or slots. The slots extend essentially around the full circumference of the pressure control ring, being interrupted only by the spacers. An example of a pressure control ring such as the one described above may be found in commonly assigned U.S. Patent No. 5,534,751 to Lenz, et al, which is herein incorporated by reference. In addition, the pressure control ring may be arranged to move between a first and second position in order to effect the pressure at the surface of the substrate. This may further enhance the processing performance of the plasma reactor. An example of a moving pressure control ring such as this may be found in commonly assigned U.S. Patent No. 6,019,060 to Lenz, which is also incorporated herein by reference.

With regards to the lower ring 53, the lower ring 53 is an annular ring arranged to concentrically surround the bottom electrode 20. In the embodiment shown, the lower ring 53 is disposed between the bottom electrode 20 and the

chamber wall 14, and more particularly adjacent the side of the bottom electrode 20 so as to provide space for the exhaust port 34. It should be noted, however, that in some instances the lower ring may provide secondary confinement (e.g., physical) by extending into the exhaust port, and may include holes or passages for allowing the gases to pass therethrough. In general, the top surface 70 of the lower ring 53 defines a lower passage of the pumping passage 37. As shown, a top surface 70 of the lower ring 53 is at about the same level as the plane that defines the top surface of the bottom electrode 20. Furthermore, the top surface 70 and a side surface 72 of the lower ring 53 are exposed to the interior of the process chamber 12.

The lower ring 53 includes an inner side ring 76 and an outer side ring 78. The inner side ring 76, as its name suggests, is located in an inner portion of the lower ring 53, and thus it is adjacent to the bottom electrode 20. The outer side ring 78, on the other hand, is located in an outer portion of the lower ring 53. In general, the outer side ring 78 is configured with a conductive core 80, which is electrically grounded as indicated at 84 (providing an RF return path), and which is either fully or partially surrounded by an insulating surface 82. The insulating surface 82 is arranged to cover at least the portions of the outer side ring 78 that are exposed to the process chamber 12, for example the top surface 70 and the side surface 72. Although not shown, the insulating surface may also cover the unexposed portions of the outer side ring 78. Furthermore, the inner side ring 76 is formed from an electrically insulating material so as to isolate the outer side ring 78 from the RF-driven bottom electrode 20 and to prevent any electrical breakdown and arcing therebetween. By way of example, the inner ring 76 may be formed from dielectric, quartz, ceramic, plastic and may have air pockets arranged therein.

In one embodiment, the outer side ring is formed from aluminum, and the exposed surfaces, for example, top surface 70 and side surface 72 are anodized aluminum surfaces. As should be appreciated, the anodized surfaces are insulating surfaces, and thus the ambient RF is capacitively terminated to the inside aluminum (conductive core) through the anodized layer. The capacitance is typically low because of the thin anodized surface. This configuration of the outer side ring is helpful for plasma confinement, and will be discussed in greater detail below.

With regards to the upper ring 54, the upper ring 54 is an annular ring arranged to concentrically surround the upper electrode 24, and is generally attached to the top plate 13 of the process chamber 12. In the embodiment shown, the upper ring 54 is disposed between upper electrode 20 and the chamber wall 14, and more particularly proximate the side of the upper electrode 24. The upper ring 54 includes an upper surface 86, a bottom surface 88, an inside surface 90 and an outside surface 92. In some embodiments, the side surface 90 of the upper ring 54 may be adjacent to the top electrode 24, and in other embodiments (as shown), a space may be provided between the top electrode 24 and the inside surface 90 of the upper ring so as to provide clearance for thermal expansion. As shown, the outside surface 92 of the upper ring 54 is configured to extend farther away from the axis 11 of the process chamber 12 than the side surface 72 of the lower ring 53. In general, the bottom surface 88 defines an upper passage of the pumping passage 37. Furthermore, the bottom surface 88 is at about the same level as the plane that defines the top surface of the upper electrode 24. It should be noted, however, that this is not a limitation and that the width of the upper ring (from surface 86 to surface 88) may be altered to restrict gas pumping in a manner similar to the pressure control ring so as to enhance plasma confinement. By way of example, the bottom surface 88 may extend in a direction towards the lower ring 53. As shown, the bottom surface 88 and the outside surface 92 of the upper ring 54 are exposed to the interior of the process chamber 12. Furthermore, the bottom surface 88 of the upper ring 54 is in a position that faces the top surface 70 of the lower ring 53. In most embodiments, the bottom surface and the top surface are substantially parallel to one another and perpendicular to the axis 11.

The upper ring 54 is formed from a suitable conductive material and is electrically grounded. The upper ring 54 can be indirectly grounded through the top plate 13 or directly grounded as indicated by 94 in Fig. 1 (providing both a DC path and a RF return path). Furthermore, the upper ring 54 is arranged to be substantially resistant to etching by the plasma 17 or to contribute substantially no metal contamination. By way of example, the upper ring 54 can be formed from a bare metal, SiC, Si sputtered over metal or the like.

The confining assembly 51, including the lower ring 53 and the upper ring 54, has several functions that can have large effects on plasma confinement. One

function includes substantially neutralizing charged particles that stream out of the process region. This is accomplished at least in part by sinking charged species at the upper ring 54. More specifically, the grounded bottom surface 88 acts as a charge sink or drain for positive ions to get neutralized before escaping the confined process region. While not wishing to be bound by theory, it is generally believed that the RF voltage creates a DC potential between the conductive and insulated surfaces during processing. The DC potential guides charged species to either the top insulated surface 70 of the lower ring 53 or to the bottom conductive surface 88 of the upper ring 54. As a result, the exiting particles make at least one collision with the top surface 70 or the bottom surface 88. Upon collision, a current flow is created that essentially removes the charge (via ground) from the charged particle, which as a result tends to neutralize the charge of the particle. For example, the conductive bottom surface 88 provides a DC ground path for charged species. As such, the density of charged particles in the outer region are substantially reduced. Accordingly, the tendency for a discharge outside the process region is reduced.

In one embodiment, the surface area of the grounded and conductive bottom surface 88 is used to control the amount of sinking particles. In effect, the greater the surface area of the bottom surface, the greater the effect in sinking charged particles.

Another function includes shielding the ambient RF (or stray electric field lines) to reduce the strength of the electric field outside the confined process region 26. This is accomplished by attracting the electromagnetic fields of the driving RF that would otherwise diverge radially outward to outside the confined process region 26 to the conductive elements of the upper and lower rings, i.e., the conductive core and conductive bottom surface. As shown in Fig. 2, a portion of the diverging or stray electric fields (shown graphically with electric field lines 96) are removed from the outer region 36 via the outer side ring 78 of the lower ring 53, as well via the upper ring 54. For ease of discussion, the electric field lines 96, which are removed by the outer side ring 78 are designated 96A, and the electric field lines, which are removed by the upper ring 54 are designated 96B. The electrical field lines 96B, which are incident on the upper ring, tend to be perpendicular because of the exposed conductive surface, while the electrical field lines 96A, which are incident on the outer side ring, tend to be angled because of the insulated top surface. The stray

electric field lines 96A couple through the insulated top surface 70 to the conductive core 80, and travel through the conductive core 80 to ground 84. In addition, the stray electric field lines 96B travel to the conductive bottom surface 88 and through the conductive bottom surface 88 to ground 94. As should be appreciated, both the conductive bottom surface and the insulated conductive core provide an RF return path. As such, the stray electric fields in the outer region are substantially reduced by both the upper ring and the outer side ring of the lower ring. Accordingly, the tendency for a discharge outside the process region is reduced.

Furthermore, charged particles tend to follow electric field lines 96A& B and therefore by reducing the electric fields in the outer region the density of charged particles in this region is also reduced. Moreover, the charged particles tend to be directed to the conductive bottom surface of the upper ring 54 by electric field 96B, which as a result, neutralizes the charged particles, especially the ionic species. The charged particles also tend to be directed to the surfaces of the pressure control ring 52, which as a result, neutralizes some of the charged particles. Accordingly, the tendency for a discharge outside the process region is reduced.

In one embodiment, the surface area of the bottom surface 88, as well as the surface area of the top surface 70 is used to control the amount of shielded field lines. In effect, the greater the surface area, the greater the effect in shielding electric fields.

In alternate embodiment, and as shown in Fig. 3, the lower ring 53 may include a first ring 112, a second ring 114, a third ring 116 and a top ring 118. In this figure, the rings are produced in accordance with the teachings of the invention set forth above with regard to inner side ring 76 and the outer side ring 78. That is, the first ring 112 corresponds to the inner side ring 76, the second ring 114 corresponds to the conductive core 80, the third ring 116 corresponds to the side surface 72, and the top ring 118 corresponds to the top surface 70. As such, the first ring 112, the third ring 116 and the top ring 118 are formed from a suitable insulating material, while the second ring 114 is formed from a suitable conductive material. The second ring 114 is also electrically grounded as indicated by 84. In another embodiment, the first ring 112, the third ring 116 and the top ring 118 may represent an integrally formed structure such that the second ring is embedded therein. In another embodiment, the

first ring 112, the third ring 116 and the top ring 118 may represent a composite structure, where each of the rings is formed from a different dielectric material. In yet another embodiment, the top ring may be an extension of the edge ring 27.

5 In one configuration, the lower ring includes an annular dielectric body having a first portion and a second portion, which encircle the bottom electrode, and a conductive core, which comprises a tube-shaped portion and an inwardly-protruding portion. The tube shape portion substantially surrounds and shields the lower portion of the annular dielectric body, while the inwardly-protruding portion is embedded
10 within the annular dielectric body itself. An example of a lower ring such as the one described above may be found in commonly assigned U.S. Patent No. 5,998,932 to Lenz, which is herein incorporated by reference.

15 In another alternate embodiment, and as shown in Fig. 4 the upper ring 54 can be split into two rings, an inner upper ring 100 and an outer upper ring 102. The inner upper ring 100, as its name suggests, is located in an inner portion of the upper ring 54, and thus it is proximate to the upper electrode (not shown in this figure). The outer upper ring 102, on the other hand, is located in an outer portion of the upper ring 54. The inner upper ring 100 is formed from a suitable dielectric material, while the
20 outer upper ring 102 is formed from a suitable conductive material and electrically grounded as indicated at 94. The inner upper ring 100 is configured to reduce particle generation due to plasma sputtering on the inner edge of the upper ring 54 that is directly exposed to the confined plasma (plasma 17 as shown in Figs. 1 & 2). The outer upper ring 102, however, is produced in accordance with the teachings of
25 the invention set forth above with regards to the single piece upper electrode. That is, the residue ions still get neutralized on the conductive surface of the grounded outer upper ring 102 before escaping to outside the confined process region, and the electric field still gets shielded by the grounded conductive outer upper ring 102.

30 In another alternate embodiment, and as shown in Fig. 5 the upper ring 54 can include a top layer 106 and a bottom layer 108. The top layer 106 is disposed in an upper portion of the upper ring 54, and thus it is proximate to the top plate (not shown in this figure). The bottom layer 108 is disposed in a bottom portion of the upper ring 54, and thus it is exposed to the interior of the process chamber 12. The top layer

106 may be formed from any suitable material whether conductive or insulating. On the other hand, the bottom layer 108, which is electrically grounded as indicated by 94, is formed from a suitable conductive material. In this embodiment, the bottom layer 108 is produced in accordance with the teachings of the invention set forth
5 above with regards to the single piece upper electrode. That is, the residue ions still get neutralized on the conductive surface of the grounded bottom layer 108 before escaping to outside the confined process region, and the electric field still gets shielded by the grounded bottom layer 108. In one implementation, the bottom layer 108 may be sputtered onto the top layer 106. Because there is not much current, the
10 sputtered layer can be a very thin layer of conductive material.

In accordance with another embodiment of the present invention, the configurations of the upper and lower ring can be reversed. That is, the upper ring can have an insulating bottom surface, and the lower ring can have a conductive top surface. The features of this embodiment may be better understood with reference to
15 the figure that follows. Fig. 6 illustrates a relevant portion of the plasma reactor 10 of Fig. 1, including process chamber 12, top plate 13, chamber walls 14, bottom electrode 20, upper electrode 24, and pressure control ring 52. Fig. 6 also illustrates a confining assembly 200 including an upper ring 202 and a lower ring 204 having an
20 inner side ring 206 and an outer side ring 208. The inner side ring 206 may respectively correspond to the inner side ring 76 illustrated in FIG. 1. The outer side ring 208, on the other hand, includes a top surface 210, which is exposed to the interior of the process chamber 12. In this embodiment, the outer side ring 208, and more particularly, the top surface 210 of the outer side ring is formed from a suitable
25 conductive material and is grounded as indicated by 84. By way of example, the outer side ring 208 or the top surface may be formed from a bare metal, SiC, or Si sputtered over metal. Additionally, the outer side ring 208 may include a side surface 214, which is also exposed to the interior of the process chamber 12. In some configurations, the side surface 214 is formed from a suitable conductive material,
30 while in other configurations, the side surface 214 is formed from a suitable insulating material. For ease of discussion, the size, shape and position of the outer side ring 208 may respectively correspond to the outer side ring 78 illustrated in FIG. 1. With regards to the upper ring 202, the upper ring 202 includes a bottom surface 216, which is also exposed to the interior of the process chamber 12. As shown, the

bottom surface 216 faces the top surface 210. In this embodiment, the upper ring 202, and more particularly, the bottom surface 216 is formed from a suitable insulating material. By way of example, the upper ring 202 may be formed from dielectric, ceramic, plastic, and the like. Like the outer side ring, the size, shape and position of the upper ring 202 may respectively correspond to the upper side ring 54 illustrated in Fig. 1.

In a manner analogous to the confining assembly 51 of Fig. 1, the confining assembly 200 of Fig. 6 can greatly improve plasma confinement. For example, since the grounded top surface 210 is directly exposed to the interior of the process chamber 12, a clearly defined sheath forms on the top of this surface, and a voltage is built up across the sheath that can further guide positive ions to the surface. As such, the grounded top surface acts as a charge sink or drain for positive ions to get neutralized before escaping the confined region. Accordingly, plasma confinement is substantially improved because positive ions that are leaking to the outside of the confined region are greatly reduced. In addition, the conductive top surface 210 effectively shields the ambient RF (or stray electric field lines) to reduce the strength of the electric field outside the confined process region 26. Again, this is accomplished by attracting the electromagnetic fields of the driving RF that would otherwise diverge radially outward to outside the confined process region 26 to the conductive elements of the lower ring, i.e., the conductive top surface.

As discussed above, the combination of a conductive top surface (e.g., outer side ring) and an insulating bottom surface (e.g., upper ring) or the combination of a conductive bottom surface (e.g., upper ring) and an insulating top surface (e.g., outer side ring) can greatly improve plasma confinement. Unfortunately, however, the combination of a conductive top surface (e.g., outer side ring) and a conductive bottom surface (e.g., upper ring) can adversely effect plasma confinement. To facilitate discussion, Fig. 7 shows a confinement assembly 300 including a lower ring 208 having a conductive top surface 210 and an upper ring 54 having a conductive bottom surface 88. As shown, there is nearly line-of-sight path between the outer edge of the upper ring 54 and the outer edge of the lower ring 208. The electrons or negative ions 302 may become trapped in the potential well defined by the sheaths formed on the conductive bottom surface 88 of the upper ring 54 and the conductive

top surface 210 of the lower ring 208. Similar to the hollow cathode effect, these trapped negative species 302 oscillate back and forth in the potential well. As a result, a glowing discharge can be induced through the collisions of other ions and neutrals (not shown) with the trapped negative species 302. Accordingly, either a combination of a dielectric upper ring and an outer side ring with a conductive surface or a combination of a conductive upper ring and an outer side ring with a dielectric top surface is implemented to improve plasma confinement.

The above concepts have been extensively tested and proved to be valid in experiments. A Langmuir probe and an E-field probe have been implemented in a dual frequency capacitive discharge reactor such as the capacitively coupled Exelan™ plasma reactor, which is available from Lam Research Corporation of Fremont, CA, to measure, respectively, the ion flux and the electric field outside the confined process region. These measurements confirmed that the electric field and the ion flux in regions outside of the process region were substantially lower than in the prior art.

As can be seen from the foregoing, the present invention offers numerous advantages over the prior art. Different embodiments or implementations may have one or more of the following advantages. One advantage of the present invention includes confining a plasma to a process region of the process chamber, while permitting by-product gas from processing to pass through. Another advantage of the present invention includes minimizing and/or eliminating unwanted plasma formations in the regions outside of the process region of the process chamber. Accordingly, the plasma can be controlled to a specific volume and a specific location inside the process chamber, ensuring more efficient coupling of energy, enhancing plasma uniformity, and increasing plasma density, all of which lead to better processing uniformity and high yields on processed substrates.

While this invention has been described in terms of several preferred embodiments, there are alterations, permutations, and equivalents, which fall within the scope of this invention. It should also be noted that there are many alternative ways of implementing the methods and apparatuses of the present invention. For example, although the confining assembly has been described and shown in terms of a

capacitively coupled plasma reactor for processing substrates, it should be noted that other plasma systems could apply the techniques and methods of the confining assembly. For example, it is contemplated that the confining assembly could be used in inductively coupled or microwave plasma reactors. It is therefore intended that the

5 following appended claims be interpreted as including all such alterations, permutations, and equivalents as fall within the true spirit and scope of the present invention.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224

What is claimed is:

1. A plasma confining assembly for minimizing unwanted plasma formations in regions outside of a process region in a process chamber, comprising:

a first confining element positioned proximate the periphery of the process region, and including an exposed conductive surface that is electrically grounded; and

a second confining element positioned proximate the periphery of the process region, and including an exposed insulating surface, which is configured for covering a conductive portion that is electrically grounded, the second confining element being spaced apart from the first confining element,

wherein the first confining element and the second confining element substantially reduces the effects of plasma forming components that pass therebetween.

2. The plasma confining assembly as recited in claim 1 further including a third confining element formed from an insulating material and disposed between the first confining element and the second confining element, and proximate the periphery of the process region, the third confinement element being arranged to physically contain a plasma inside the process region and to substantially reduce the effects of plasma forming components that pass between the first confining element and the second confining element.

3. The plasma confining assembly as recited in claim 2 wherein the third confining element is a ring that surrounds at least a portion of the process region, the third confining element being configured to permit by-product gas from the processing to pass through while substantially confining the plasma inside the process region.

4. The plasma confining assembly as recited in claim 1 wherein the plasma forming components are charged particles or electric fields.

5. The plasma confining assembly as recited in claim 4 wherein the first confining element and the second confining element are arranged to direct charged

particles to the exposed conductive surface and sink charged particles therethrough to ground so as to reduce the density of charged particles in regions outside of the process region.

5 6. The plasma confining assembly as recited in claim 4 wherein the first confining element and the second confining element are arranged to attract electric fields to the grounded conductive surface and the grounded conductive portion, respectively, so as to reduce the electrical field strength in regions outside of the process region.

10 7. The plasma confining assembly as recited in claim 1 wherein the first confining element is disposed in an upper portion of the process chamber, and wherein the second confining element is disposed in a lower portion of the process chamber.

15 8. The plasma confining assembly as recited in claim 7 wherein the first confining element is a ring that surrounds an upper electrode, and wherein the second confining element is a ring that surrounds a bottom electrode, the upper and bottom electrode being arranged for producing an electric field that helps to ignite and sustain a plasma.

20 9. The plasma confining assembly as recited in claim 1 wherein the first confining element is disposed in a lower portion of the process chamber, and wherein the second confining element is disposed in an upper portion of the process chamber.

25 10. The plasma confining assembly as recited in claim 9 wherein the first confining element is a ring that surrounds a bottom electrode, and wherein the second confining element is a ring that surrounds an upper electrode, the upper and bottom electrode being arranged for producing an electric field that helps to ignite and sustain a plasma.

30 11. The plasma confining assembly as recited in claim 1 wherein the second confining element includes a non-exposed conductive core, which is at least partially covered by the insulating surface, and which is grounded.

12. The plasma confining assembly as recited in claim 11 wherein the non-exposed conductive core is formed from aluminum and wherein the exposed insulating surface is formed from anodized aluminum.

13. The plasma confining assembly as recited in claim 1 wherein the conductive surface of the first confining element is formed from an electrically conducting material that is either substantially resistant to etching by a plasma present within the chamber during the processing or contributes substantially no metal contamination.

14. A plasma reactor for processing a substrate, comprising:
a chamber having chamber walls;
an electrode arrangement configured for generating an electric field, which is sufficiently strong to both ignite and sustain a plasma for the processing within the chamber, the arrangement comprising a first electrode and a second electrode which is spaced apart from the first electrode, the first electrode and the second electrode defining a process region therebetween; and
a plasma confinement assembly for preventing the plasma from forming outside of the process region, the plasma confinement assembly comprising a first ring, which is configured to surround the first electrode, and a second ring, which is configured to surround the second electrode, the first ring including an exposed conductive surface that is electrically grounded, the second ring including an exposed insulating surface covering a non exposed conductive element that is grounded,
wherein the plasma confinement assembly substantially reduces the effects of plasma forming components that pass between the first confinement ring and the second confinement ring.

15. The plasma confining assembly as recited in claim 14 further including a pressure control ring formed from a dielectric medium and disposed between the first and second rings, the pressure control ring being configured for physically confining a plasma within the process region, while permitting the passage of process gases to pass therethrough.

16. The plasma reactor as recited in claim 14 wherein the first electrode and the second electrode are parallel to one another, and wherein the exposed insulating surface is level with a top surface of the second electrode.

5 17. The plasma reactor as recited in claim 14 wherein the first ring is disposed between the first electrode and the chamber wall, and wherein the second ring is disposed between the second electrode and the chamber wall.

10 18. The plasma reactor as recited in claim 14 wherein the first ring includes an inner ring and an outer ring, wherein the inner ring is formed from a dielectric medium and disposed between the first electrode and the outer ring, and wherein the outer ring includes the conductive surface, which is grounded.

15 19. The plasma reactor as recited in claim 14 wherein the second ring includes an inner ring and an outer ring, wherein the inner ring is formed from a dielectric medium and disposed between the second electrode and the outer ring, and wherein the outer ring includes a conductive core, which is covered by the insulating layer, and which is electrically grounded.

20 20. The plasma reactor as recited in claim 14 wherein the conductive element is a portion of the chamber.

25 21. The plasma reactor as recited in claim 14 wherein the first ring and the second ring extend in a radial direction relative to an axis of the process chamber, and wherein an outer edge of the first ring extends further than an outer edge of the second ring.

CHAMBER CONFIGURATION FOR CONFINING A PLASMA

5

Abstract of the Disclosure

10

15

20

A plasma confining assembly for minimizing unwanted plasma formations in regions outside of a process region in a process chamber is disclosed. The plasma confining assembly includes a first confining element and second confining element positioned proximate the periphery of the process region. The second confining element is spaced apart from the first confining element. The first confining element includes an exposed conductive surface that is electrically grounded and the second confining element includes an exposed insulating surface, which is configured for covering a conductive portion that is electrically grounded. The first confining element and the second confining element substantially reduce the effects of plasma forming components that pass therebetween. Additionally, the plasma confining assembly may include a third confining element, which is formed from an insulating material and disposed between the first confining element and the second confining element, and proximate the periphery of the process region. The third confining element further reduces the effects of plasma forming components that pass between the first confining element and the second confining element.


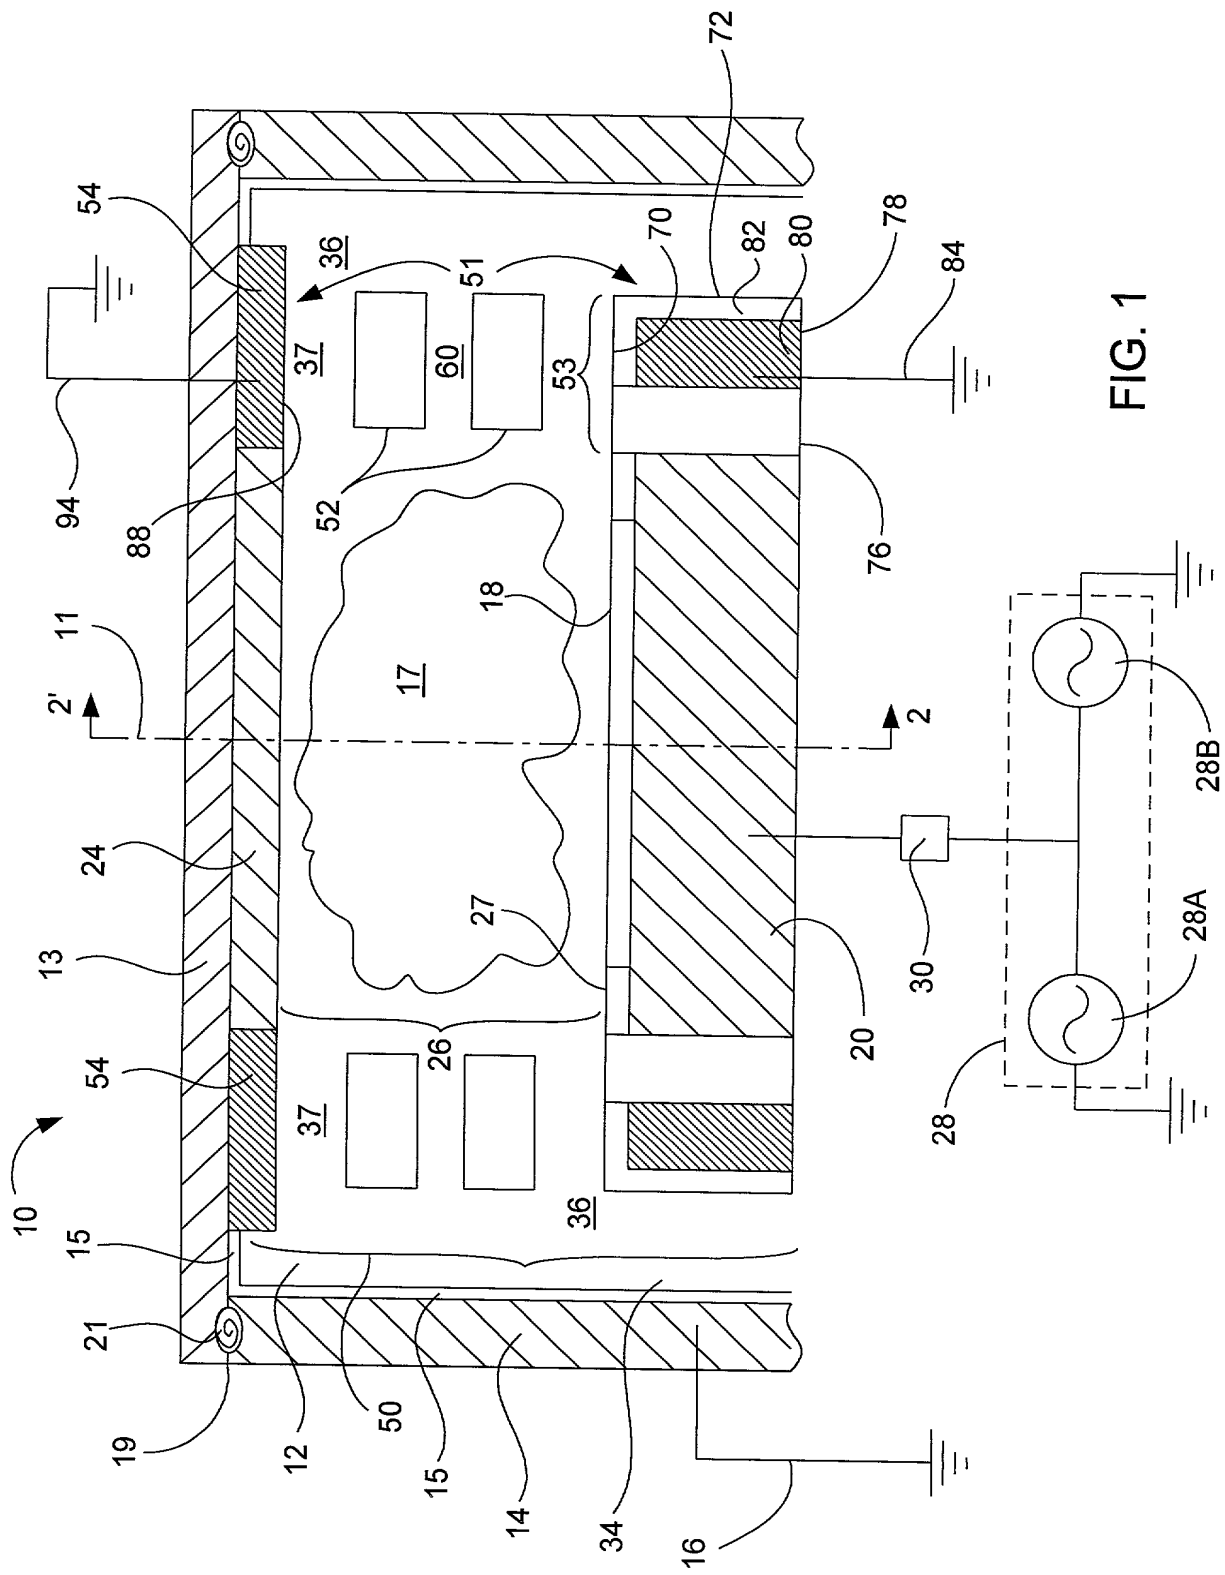


FIG. 1



3/4

